

# Frontrunner Entry




Open-grid, slip-resistant entrance matting designed for high traffic areas.



Set the scene with Frontrunner Entry, the perfect entrance matting for high traffic areas.

The mat's aggressive tread pattern scrapes shoes and wheels clean, while the open grid traps and collects the dirt and debris, preventing it from being tracked inside. This expands the life of your floor finishes and keeps interiors looking stylish for longer.

Working with ceramic floor tiles or carpet? Frontrunner Entry also comes in a 1 3/32" low profile, which means you don't need to create a deeper mat well in the existing subfloor.

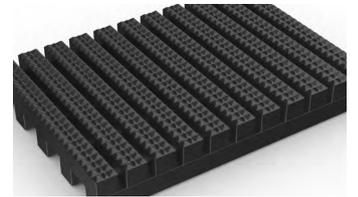

## Features:



Diamond cut pattern



Two layer open-grid construction



Close mesh grid



Made from flexible PVC



Comes in 33' (10m) rolls or modules



## Benefits:



Certified slip resistant (DIN 51130:R11, ASTM 1677:0.6/0.6)



Excellent drainage (DIN 51130:V10)



Wheel-and-heel proof



Easy to cut on site, contours to uneven surfaces



Seamless installation



## Plastex Matting Inc.

120 55th St NE  
Fort Payne, AL 35967  
+1 256 845 7725

USA + UK manufactured matting products:  
[plastexmatting.com](http://plastexmatting.com)

### Standard sizes:

Product	Fronrunner Entry	Low Profile
Height	9/16" (14mm)	13/32" (10.5mm)
Standard roll options	33' x 2' (10 x 0.6m)	33' x 2' (10 x 0.6m)
	33' x 3' (10 x 0.91)	33' x 3' (10 x 0.91m)
	33' x 4' (10 x 1.22m)	33' x 4' (10 x 1.22m)
Standard module option	2'7" x 4' (0.8 x 1.22m)	
	3'3" x 4'11" (1 x 1.5m)	
	3'7" x 6'7" (1.1 x 2m)	
Weight	2lbs/sq.ft (10.5kg/m <sup>2</sup> )	1.6lbs/sq.ft (8.7kg/m <sup>2</sup> )

Surface modules are supplied with factory fitted PVC ramped edging to four sides

### Tolerances:

	Height (+/- 0.05")	Length (0+1.0')	Width (+/- 1/2")
Fronrunner Entry	9/16"	33'	2' 3' 4'
Fronrunner Entry Low Profile	13/32"	33'	2' 3' 4'

All dimensions are nominal

### Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by <a href="#">downloading this information sheet</a>
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	Fronrunner Entry is 100% recyclable. Our Fronrunner Entrance matting system qualifies for LEED IEQ Credit 5, and when produced in black or gray, our Fronrunner range may also qualify for LEED MR Credit 4. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by <a href="#">downloading this information sheet</a> .
Slip resistance	ASTM F 1677- Dry/Wet: 0.6/0.6 DIN 51130: R11, V10
Thermal	Designed to function at temperatures from -9°F and up to +140°F. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation
Volatile organic compound (VOC)	CDPH/EHLB Standard Method V1.2-2017 (California Section 01350) - School Classroom: PASS CDPH/EHLB Standard Method V1.2-2017 (California Section 01350) - Office: PASS Measured concentration of Total Volatile Organic Compounds (TVOC): Less than/equal to 0.5 mg/m <sup>3</sup> (in compliance with CDPH.EHLB Standard Method v1.2-2017)
Warranty	Two years. Visit our <a href="#">policies page</a> for more information about warranties

# Frontrunner Entry




## Product data sheet

### Colors:



Black




Dark gray



Dark brown



Oxford blue



Holly green

More colors available upon request

### Installation:

Frontrunner Entry's one-piece construction means installation is simple:

- Cut to fit on site – no special tools or previous site visits needed
- Integrates with all internal floor coverings
- Fits with different well depths
- Contours to the floor

[Watch](#) or download the [recessed entrance matting installation instructions](#) and the [surface-mounted installation instructions](#)

### Cleaning:

Keeping Frontrunner Entry looking good is easy:

- Simply roll or lift to clean
- No special tools needed
- Easy to clean using a vacuum, plus a coarse brush for clearing the debris in the grid

[Watch](#) or [download](#) the the cleaning instructions.

### Ancillaries:

#### > For surface mounted installations

#### PVC edging (H: 9/16, W: 2 1/2")




Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black, dark gray, dark brown, holly green, Oxford blue, yellow. Size: 9/16" x 2 1/2" x 33' (14mm x 60mm x 10.1m)

#### PVC Edging (H: 9/16, W: 3 3/4")



Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black, dark gray and yellow. Size: 9/16" x 3 3/4" x 33' (14mm x 100mm x 10.1m)

#### PVC snap track (H: 9/16")



Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black, dark gray and yellow. Size: 9/16" x 3 3/4" x 33' (14mm x 100mm x 10.1m)

#### Aluminium edging (H: 9/16")



Supplied in sections of 6'6" (2m) length with fixing screws and plugs. Comes in anodized aluminum and powder coated yellow. Size: 9/16" x 1 13/16" x 6'6" (14mm x 45mm x 2m)

#### Connector clips: side-to-side (H: 9/16")




For joining sections of matting together side-to-side. Supplied in packs of 10

### Ancillaries:

#### > For recessed installations

##### J frame (H: 9/16")



Installing Frontrunner against a wall? You'll need a J frame to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length. Comes in anodized aluminum. Size: 9/16" x 10' (14mm x 3m)

##### J frame (H: 1 1/16")



Installing Frontrunner against a wall? You'll need a J frame to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in dark gray and black. Size: 1 1/16" x 2 3/8" (18mm x 60mm)

##### H section (H: 9/16")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a H section to secure the different sections together. Supplied in sections of 12' (3.6m) length, with fixing screws and plugs. Comes in black, with mat insert colour specified. Size: 9/16" x 1/2" (14mm x 13mm).

##### R frame (H: 9/16")



You'll need these to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 9/16" x 15/32" (14mm x 12mm)

##### T frame (H: 9/16")



You can use a T frame (1") to divide the matting into sections left-to-right – this makes it easier to lift and clean. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black

##### TL frame (H: 9/16")



You can use a T/L frame (2") to divide the matting into sections left-to-right – this makes it easier to lift and clean. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminium

##### U section (H: 9/16")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a U section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 9/16" x 3/4" (14mm x 19mm)

##### L frame (H: 5/8")




Installing around a circular door or non rectangular space? You'll need a L frame to secure the matting. Size: 5/8" x 8' (15mm x 2.7m length)

### Ancillaries:

#### > For surface mounted installations: Low profile

PVC edging (H: 3/8", W: 2")



Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black and dark gray. Size: 3/8" x 2" x 33' (10mm x 50mm x 10.1m)

PVC snap track (H: 13/32")



Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. Supplied with cold welding paste. Comes in dark gray and black. Size: 13/32" x 8'2" (10.5mm x 2.5m)

Connector clips: side-to-side (H: 3/8")



For joining sections of low profile matting together side-to-side. Supplied in packs of 10


#### > For recessed installations: Low profile

H section (H: 3/8")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a H section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in black, with mat insert colour specified. Size: 3/8" x 1/2" (10mm x 13mm)

J frame (H: 3/8")

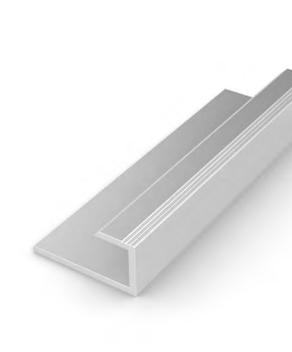

Installing Frontrunner against a wall? You'll need an edge J to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length with no pre-drilled holes. Comes in anodized aluminum, sold in quantities of 100. Size: 3/8" x 10' (10mm x 3m)

### Ancillaries:

R frame (H: 3/8")



You'll need these to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 3/8" x 15/32" (10mm x 12mm)

U section (H: 3/8")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a U section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 3/8" x 11/16" (10mm x 18mm)

U section (H: 3/8")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a U section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 3/8" x 11/16" (10mm x 18mm)

Z frame (H: 3/8")



Installing matting next to ceramic tiles? You'll need a Z frame to secure the matting. Supplied in sections of 11' (3.6m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 3/8" x 15/16" (10mm x 24mm)

T frame inverted (H: 10mm)



You can use a T frame to divide the matting into sections left-to-right – this makes it easier to lift and clean. Supplied in sections of 3m (10') length with no pre-drilled holes. Comes in anodized aluminum.