


Hard-wearing, slip-resistant matting perfect for commercial and industrial workplaces.



Our number one defence against slippery environments, Vynagrip is heavy-duty matting that's designed to withstand all kinds of workplace liquids.

Made from non-porous PVC with a diamond cut pattern, Vynagrip is impermeable to fluids and provides excellent drainage, making it ideal for environments where spillages are likely. It's also perfect for workplaces with standing employees: the two-layer construction provides comfortable cushioning and anti-fatigue properties proven to help boost productivity.

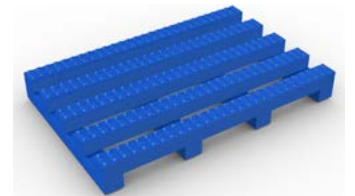

Features:



Diamond cut pattern



Two layer open-grid construction



Made from non-porous PVC



Proven anti-fatigue properties



Comes in 10m (33') rolls or ramped modules



Benefits:



Certified slip resistant
(DIN 51130:RII, ASTM I677: I.0/0.9)



Excellent drainage
(DIN 51130:VI0)



Chemical, oil and acid resistant



Boosts productivity



Contours to uneven surfaces



Plastex Matting Inc.

120 55th St NE
Fort Payne, AL 35967
+1 256 845 7725

USA + UK manufactured
matting products:
plastexmatting.com

Standard sizes:

	Vynagrip	Vynagrip and Vynagrip Plus	Vynagrip Modules
Height	15mm (5/8")	15mm (5/8")	15mm (5/8")
Standard roll options	5 x 0.6m (16'6" x 2')	10 x 0.6m (33' x 2')	
	5 x 0.91m (16'6" x 3')	10 x 0.91m (33' x 3')	
	5 x 1.22m (16'6" x 4')	10 x 1.22m (33' x 4')	
Standard module options			1.2 x 0.8m (4' x 2'5")
			1.5 x 1m (5' x 3'3")
Weight	7.6kg/m2 (1.6lb/sq.ft)	7.6kg/m2 (1.6lb/sq.ft)	7.6kg/m2 (1.6lb/sq.ft)

Surface modules are supplied with factory fitted PVC ramped edging to four sides

Tolerances:


	Height (+/- 0.5mm)	Length (0+0.3m)	Width (0+1cm)
Vynagrip	15 mm	5 m 10 m	60 cm 91 cm 122 cm
Vynagrip Plus	15 mm	10 m	60 cm 91 cm 122 cm

All dimensions are nominal


Technical information:

Acoustic	Excellent sound absorption
Anti-fatigue	10% reduction in fatigue (University of Hertfordshire study, 1997).
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet .
Composition	Flexible Polyvinyl Chloride (PVC)
Electrical	BS 2782: Part 2 Method 230A. Insulation resistance > 2000M Ω Electric strength = 12,600 volts
Environment	Vynagrip and Vynagrip Plus is 100% recyclable. When manufactured in black, Vynagrip and Vynagrip Plus is made using our post industrial recycled material. The recycled content averages at least 30%, but we strive for 100% wherever possible. We don't use any substances included in the SVHC list under REACH in any of our matting products..
Fire	EN ISO 13501-1:2007-Cfl-Sl.
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Impact	ASTM F3351 Impact - Specified Fall Height (8 ft): Pass ASTM F1292 Impact - Critical Fall Height (18 ft): Pass
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Rolling resistance	ASTM F 2753: No apparent damage to the vinyl portion of the system after 1,000 cycles at 500lbs
Slip resistance	ASTM F 1677- Dry/Wet: 1.0/0.9 DIN 51130: R11, V10
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation. The red colour isn't colourfast in direct sunlight.
Warranty	Four years. Visit our policies page for more information about warranties


Colours:



Black



Red



Blue



Black with yellow bands

More colours available upon request

Installation:

Vynagrip's one-piece construction means installation is simple:

- Modules come with factory fitted edging around three sides and fit snugly against work stations
- Rolls are easy to cut on site
- Contours to uneven surfaces

Cleaning:

Keeping Vynagrip looking good is easy:

- Easy to move; simply roll or lift to clean
- No special cleaning tools needed
- Easy to wash down with a high pressure hose

Ancillaries:


> Vynagrip and Vynagrip Plus

PVC edging (H: 14mm, W: 60mm)



Supplied in rolls of 10.1m (33') length. One tube of cold welding paste recommended for every 10m of edging. Comes in black, dark grey, dark brown, holly green, Oxford blue, yellow. Size: 14mm x 60mm x 10.1m (9/16" x 2 1/2" x 33')

Aluminum edging (H: 15mm)



Supplied in sections of 2m (6'6") length with fixing screws and plugs. Comes in anodized aluminum and powder coated yellow. Size: 15mm x 45mm x 2m (5/8" x 1 13/16" x 6'6")

Large floor hooks (H: 14mm)



For securing sections of matting to the floor. Supplied in packs of 10 with screws and plugs

PVC edging (H: 14mm, W: 100mm)



Supplied in rolls of 10.1m (33') length. One tube of cold welding paste recommended for every 10m of edging. Comes in black, dark grey and yellow. Size: 14mm x 100mm x 10.1m (9/16" x 3 3/4" x 33')

PVC snap track (H: 14mm)



Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. We recommend one tube of cold welding paste for every 10m of edging. Comes in black and dark grey. Size: 14mm x 2.5m (9/16" x 8'2")

Small floor hook (H: 14mm)



For securing sections of matting to the floor. Supplied in packs of 20 with screws and plugs

Ancillaries:

> Vynagrip and Vynagrip Plus

Connector clips: side-to-end (H: 14mm)



For joining sections of matting together side-to-side. Supplied in packs of 10

Connector clips: dual purpose (H: 14mm)



For joining sections of matting together side-to-side or end-to-end. Supplied in packs of 10